


Abmessungen/Technische Daten*

MUK...	Ø	80	-	100	110	120	130	150	-	180	200	-	250	300	350	400
L1 ± 5	mm	191,0		191,0	191,0	191,0	186,0	186,0		186,0	186,0		186,0	186,0	330,0	330,0
L2 ± 3	mm	55,0		55,0	55,0	55,0	55,0	55,0		55,0	55,0		55,0	55,0	55,0	55,0
L3 ± 3	mm	55,0		55,0	55,0	55,0	55,0	55,0		55,0	55,0		55,0	55,0	55,0	55,0
L4 ± 10	mm	197,0		207,0	212,0	217,0	222,0	232,0		247,0	257,0		282,0	307,0	332,0	357,0
ØI + 0,5 / - 0	mm	80,0		100,0	110,0	120,0	130,0	150,0		180,0	200,0		250,0	300,0	350,0	400,0
ØA + 0 / - 0,5	mm	79,5		99,5	109,5	119,5	129,5	149,5		179,5	199,5		249,5	299,5	349,5	399,5
ØM ± 10	mm	90,0		90,0	90,0	90,0	90,0	90,0		90,0	90,0		90,0	90,0	90,0	90,0
Wandstärke	mm	0,8		0,8	0,8	0,8	1,0	1,0		1,0	1,0		1,0	1,0	1,5	1,5
ζ-Wert geschlossen	-	> 600														
ζ-Wert offen	-	< 1,2														
Maximale Abgastemperatur	°C	200, mit optionaler Graphitdichtung 400														


MUK...D	Ø	80	-	100	110	-	-	150	-	180	200	-	250	-	-	-
L1 ± 5	mm	191,0		191,0	191,0			186,0		186,0	186,0		186,0			
L2 ± 3	mm	55,0		55,0	55,0			55,0		55,0	55,0		55,0			
L3 ± 3	mm	55,0		55,0	55,0			55,0		55,0	55,0		55,0			
L4 ± 10	mm	197,0		207,0	212,0			232,0		247,0	257,0		282,0			
ØI + 0,5 / - 0	mm	80,0		100,0	110,0			150,0		180,0	200,0		250,0			
ØA + 0 / - 0,5	mm	79,5		99,5	109,5			149,5		179,5	199,5		249,5			
ØM ± 10	mm	90,0		90,0	90,0			90,0		90,0	90,0		90,0			
Wandstärke	mm	0,8		0,8	0,8			1,0		1,0	1,0		1,0			
ζ-Wert geschlossen	-	> 600														
ζ-Wert offen	-	< 1,4														
Maximale Abgastemperatur	°C	120,0														

MUK.../... (LAS)	Ø	80/125	100/150
L1 ± 3	mm	130	130
L2 ± 3	mm	150	150
L3 ± 3	mm	10	10
L4 ± 3	mm	10	10
L5 ± 10	mm	195	195
ØI1 ± 1	mm	81	101
ØI2 ± 1	mm	126	151
ØA1 + 0 / - 0,5	mm	79,5	99,5
ØA2 + 0 / - 0,5	mm	124,5	149,5
ØM ± 10	mm	90	90
Wandstärke	mm	0,8	0,8
ζ-Wert geschlossen	-	> 600	
ζ-Wert offen	-	< 1,4	
Maximale Abgastemperatur	°C	120	

* Technische Änderungen und Irrtümer behalten wir uns vor.

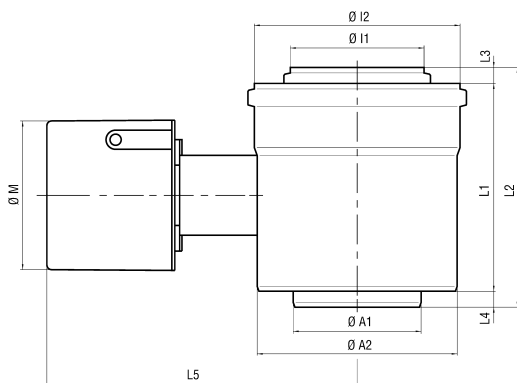

MUK ... /... (LAS)

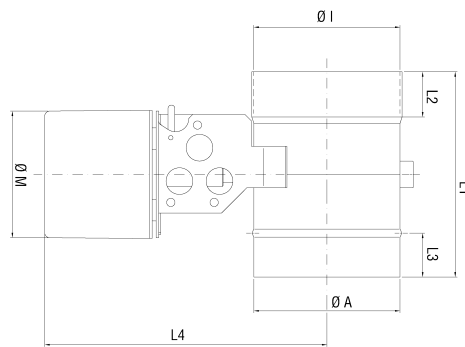

MUK ... und MUK ... D